


## TREA 60-80 Nm 24 VDC Oransal (PCU) Elektrik Aktüatör Bağlantı Şeması

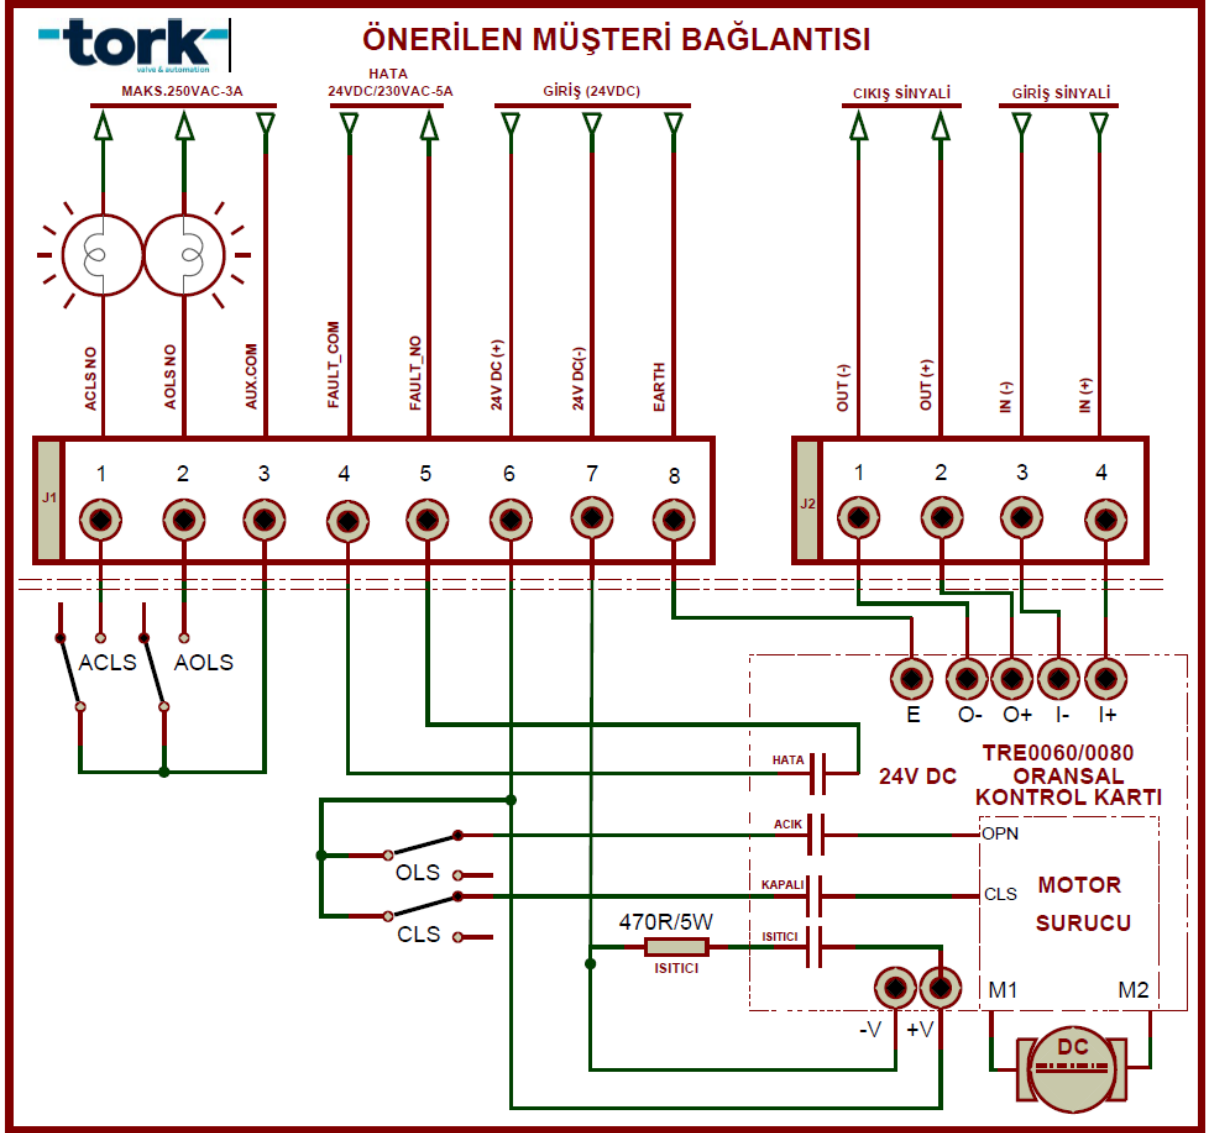

| INPUT   | 1   | 2   | 3   | 4   |
|---------|-----|-----|-----|-----|
| 0-5 V   | OFF | ON  | OFF | OFF |
| 0-10 V  | OFF | ON  | OFF | ON  |
| 1-5 V   | OFF | ON  | ON  | OFF |
| 2-10 V  | OFF | ON  | ON  | ON  |
| 0-10 mA | ON  | OFF | OFF | OFF |
| 0-20 mA | ON  | OFF | OFF | ON  |
| 2-10 mA | ON  | OFF | ON  | OFF |
| 4-20 mA | ON  | OFF | ON  | ON  |

| OUTPUT  | 1   | 2   | 3   |
|---------|-----|-----|-----|
| 0-5 V   | ON  | OFF | OFF |
| 0-10 V  | ON  | OFF | ON  |
| 1-5 V   | ON  | ON  | OFF |
| 2-10V   | ON  | ON  | ON  |
| 0-10 mA | OFF | OFF | OFF |
| 0-20 mA | OFF | OFF | ON  |
| 2-10 mA | OFF | ON  | OFF |
| 4-20 mA | OFF | ON  | ON  |