
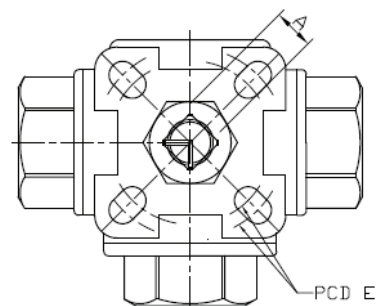
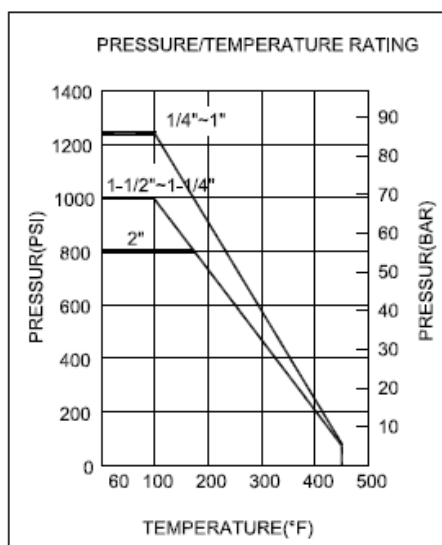


KV-904

► BALL VALVE SIZE

Ball Valve Details

Body	: SS304
Ball	: SS304
Cover Flange	: ISO5211
Connection Standard	: NPT, BSPT, DIN259, DIN2999, ISO CLASS A
Working Pressure	: PN 63
Way	: 3/2 (L-Type or T-Type)
Size	: 1/2" 2"
Applications	• Chemical Industry • For acids and chemical controls • For purpose of drain and stopper at the end of the line • Treatment plants • Stainless Steel Resistant Fluid Types
Sealing	: PTFE

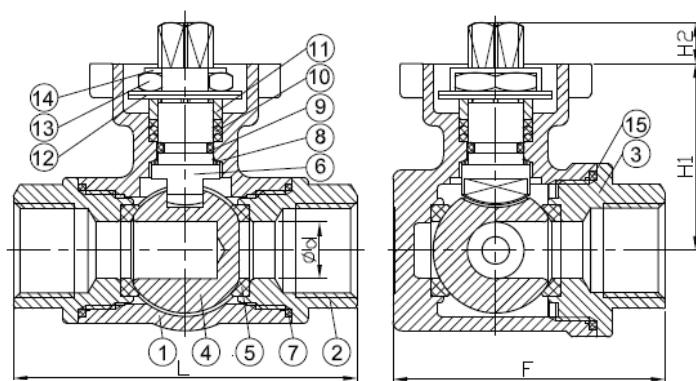

P. NO	PART NAME	MATERIAL TYPE
1	Body	CF8/CF8M
2	Cap-B	CF8/CF8M
3	Cap-A	CF8/CF8M
4	Ball	CF8/CF8M
5	Bearing	PTFE
6	Gasket	SUS304/SUS316
7	Sealing-B	PTFE
8	Stamp	15%R+PTFE
9	O-Ring	VITON
10	Gasket	PTFE
11	Gasket Bracelet	SUS 304
12	Spring Washer	SUS 304
13	Gasket Nut	SUS 304
14	Disc Spring	SUS 304
15	Sealing-A	PTFE

SIZE	d	L	F	E	H1	H2	A
1/4"	11.6	76.0	58.5	□36 /□42	41.0	9	9
3/8"	12.5	76.0	58.5	□36 /□42	41.0	9	9
1/2"	12.5	76.0	58.5	□36 /□42	41.0	9	9
3/4"	16.0	86.0	72.1	□36 /□42	44.3	9	9
1"	20.0	99.1	81.8	□42 /□50	53.5	11	11
1 - 1/4"	25.0	117.4	94.7	□42 /□50	59.2	11	11
1 - 1/2"	32.0	123.8	103.9	□50 /□70	75.9	15	14
2"	38.0	148.0	125.5	□50 /□70	84.1	15	14

TYPE	1	2	3	4
L				
T				

Ball Valve Code

Single Acting Actuated Ball Valve Code

Double Acting Actuated Ball Valve Code

: Tork-KV.904

: PAV-904.SR

: PAV-904.DA