

Manual Reset Natural Gas Solenoid Valve S8011 Series (G3/8", G1/2", G3/4", G1", G11/4", G11/2", G2")

GENERAL FEATURES

- Wide pressure range, flow rate and orifis options.
- Solenoid valves should be used with a filter.
- Solenoid valves can be mounted in any position without affecting its operation; the coil should be preferred in vertical up position.
- S8011 series manual reset gas solenoid valve 2/2 way normal open.
- It is suitable for natural gas, lpg, methane, butane, propane, city gas, air, non-corrosive gases, which are compatible with the use structure of the valve.
- Operating temperature: -10 °C / +80 °C
- No pressure differential is required.

ELECTRICAL CHARACTERISTICS

Continuous Duty	: ED %100
Coil Insulation Class	: H (180°C)(IEC 85)
Coil Impregnation	: Polyester Fiber Glass
Ambient Temperature	: -10°C, +60°C
Protection Degree	: IP65 (ISO 60529) On request; IP68
Electric Plug Connection	: DIN 46340 3- Poles Connector(DIN43650)
Connector Specification	: ISO 4400 / EN 175301-803 Form A, Spade Plug (Cable Ø6-8 mm)
Electrical Safety	: IEC 335
Standard Voltages	: AC 12V 15VA, 24V 15VA, 48V, 15VA, 110V 15VA, 230V 15VA, 230V 24VA DC 12V 18W, 24V 18W, 48V, 18W, 110V 18W

On request other voltages

Voltages Tolerance : AC -15%, +10% DC -5%, +10%

Frequency : 50 Hz (60 Hz...)

On request; Connector with LED, PWM Socket

Specify coil voltage with order

MATERIALS IN CONTACT WITH FLUID

Body	: Aluminium
Internal Parts	: Stainless Steel
Sealing	: NBR
Shading Ring	: Copper (EN 12735-1)
Seats, Core Tube, Springs	: Stainless Steel

OPTIONS

Female connection: BSP; (On request NPT)

- On request Atex (exproof) coil.

TECHNICAL FEATURES

Max. Viscosity : 5°E (~37cST veya mm²/s)

Response Time : Opening time : 30 ms

Closing Time : 30 ms

SEALS FEATURES

NBR : -10°C...+80°C

EPDM : -10°C...+130°C


VITON : -10°C...+160°C



NORMALLY OPEN

2/2 WAY

ΔP=0

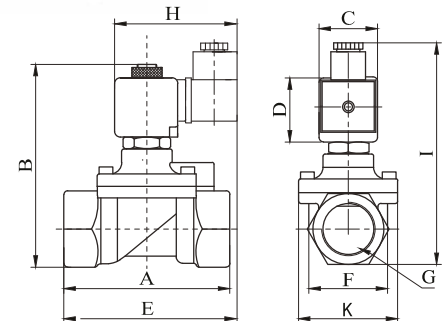

Dimensions (mm)						
G	A	B	C	D	E	F
3/8"	86	142	101	41	75,5	70
1/2"	86	142	101	41	75,5	70
3/4"	86	142	101	41	75,5	70
1"	86	142	101	41	75,5	70

Dimensions (mm)			
G	A	B	C
11/4"	180	160	140
11/2"	180	160	140
2"	180	160	140

Coils	Nominal Values	Cold/Hot	Inrush	Holding	Current (A)	Surface Temperature (°C)
C40012VDC18W	12VDC 18W	COLD	19,56	19,56	1,63	20
		HOT	14,52	14,52	1,21	106
C40024VDC18W	24VDC 18W	COLD	20,88	20,88	0,87	25
		HOT	14,64	14,64	0,61	116
C40110VDC18W	110VDC 18W	COLD	19,96	19,96	0,18	23
		HOT	13,56	13,56	0,123	115
C40012VAC15VA	12VAC 15VA	COLD	23,81	16,43	1,3	25
		HOT	-	15,86	1,262	79
C40024VAC15VA	24VAC 15VA	COLD	25,82	15,02	0,62	22
		HOT	-	13,91	0,57	81
C40110VAC15VA	110VAC 15VA	COLD	30,65	15,17	0,137	24
		HOT	-	13,96	0,126	80
C40230VAC15VA	230VAC 15VA	COLD	31,4	15,64	0,068	25
		HOT	-	14,41	0,063	80
C40230VAC15VA	230VAC 24VA	COLD	45,1	23,92	0,0154	23
		HOT	-	21,62	0,0154	100

Solenoid Valve Symbol	Valve Type/Order No	Connection Size	Orifis Size	Pressure min/max		Q	Seal	Weight
	S8011	G	mm	Bar	Bar	m³/h	NBR	kg
	S8011.02	3/8"	24	0	0-0,5	10	✓	0,62
	S8011.03	1/2"	24	0	0-0,5	14	✓	0,61
	S8011.04	3/4"	24	0	0-0,5	32	✓	0,6
	S8011.05	1"	24	0	0-0,5	38	✓	0,53
	S8011.06	11/4"	40	0	0-0,5	105	✓	1,6
	S8011.07	11/2"	40	0	0-0,5	125	✓	1,55
	S8011.08	2"	50	0	0-0,5	145	✓	1,7

Not: Please look catalogues for more details.

STANDARDS

- Standard tube connection G (BSP) (ISO 228-1) and other tube connections (NPT (ANSI 1.20.3)) are available on request.
- TORK solenoid valves 97/23/EC, are available for pressure equipment directive (PED) and 2006/95/ECC low voltage directive (LVD).