

Coupling Connected Cooler Solenoid Valve S6210 Series

GENERAL FEATURES

- Wide pressure range, flow rate and orific sizes options.
- Solenoid valves are used with filters.
- Solenoid valves can be mounted in any position without affecting its operation, coil to be used in a vertical position.
- It is applicable for natural gas, lpg, methan, butane, propane, gas, noncorrosive gas. These are applicable for valve usage

ELECTRICAL CHARACTERISTICS

Continuous Duty	: ED %100
Coil Insulation Class	: H (180°C)(IEC 85)
Coil Impregnation	: Polyester Fiber Glass
Ambient Temperature	: -10°C, +60°C
Protection Degree	: IP65 (ISO 60529) On request; IP68
Electric Plug Connection	: DIN 46340 3- Poles Connector(DIN43650)
Connector Specification	: ISO 4400 / EN 175301-803 Form A, Spade Plug (Cable Ø6-8 mm)
Electrical Safety	: IEC 335
Standard Voltages	: AC 12V 15VA, 24V 15VA, 48V, 15VA, 110V 15VA, 230V 24VA, DC 12V 18W, 24V 18W, 48V, 18W, 110V 18W On request other voltages
Voltages Tolerance	: AC -15%, +10% DC -5%, +10%
Frequency	: 50 Hz (60 Hz...)
On request; Connector with LED, PWM Socket	
Specify coil voltage with order.	

MATERIALS IN CONTACT WITH FLUID

Body	: Brass
Internal Parts	: Stainless Steel,
Sealing	: NBR, on request; VITON, EPDM
Shading Ring	: Copper (EN 12735-1)
Seats, Core Tube, Springs	: Stainless Steel

OPTIONS

Female connection: On request Atex (exp-proof) coil.

TECHNICAL FEATURES

Cooling	: CFC, HCFC, HFC
Fluid Temperature	: -30°C +105 °C

SEALS FEATURES

NBR	: -10°C...+80°C
EPDM	: -10°C...+130°C
VITON	: -10°C...+160°C
PTFE	: -30°C...+105°C
RUBY	: -10°C...+160°C



NORMALLY CLOSED


2 WAY

PILOT OPERATED
ΔP=0,1

DIRECT ACTING
ΔP=0



COOLING

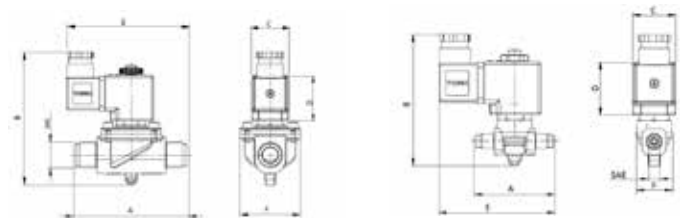


Pilot Operated Dimensions (mm)

SAE	Orific Size	A	B	C	D	E	F
3/8"	6.5	85	104.8	32	39	100	42.5
3/8"	8	85	104.8	32	39	100	42.5
1/2"	6.5	85	104.8	32	39	100	42.5
1/2"	10	85	104.8	32	39	100	42.5
5/8"	12.5	85	104.8	32	39	106.2	42.5
5/8"	15	85	104.8	32	39	106.2	42.5

Direct Acting Dimensions (mm)

SAE	Orific Size	A	B	C	D	E	F
1/4"	2.5	60	97.1	32	39	86.2	25.7
1/4"	3	60	97.1	32	39	86.2	25.7
3/8"	3	60	97.1	32	39	86.2	25.7

Coils	Nominal Values	Cold/ Hot	Inrush	Holding	Current (A)	Surface Temperature (°C)
C40012VDC18W	12VDC 18W	COLD	19,56	19,56	1,63	20
		HOT	14,52	14,52	1,21	106
C40024VDC18W	24VDC 18W	COLD	20,88	20,88	0,87	25
		HOT	14,64	14,64	0,61	116
C40110VDC18W	110VDC 18W	COLD	19,96	19,96	0,18	23
		HOT	13,56	13,56	0,123	115
C40012VAC15VA	12VAC 15VA	COLD	23,81	16,43	1,3	25
		HOT	-	15,86	1,262	79
C40024VAC15VA	24VAC 15VA	COLD	25,82	15,02	0,62	22
		HOT	-	13,91	0,57	81
C40110VAC15VA	110VAC 15VA	COLD	30,65	15,17	0,137	24
		HOT	-	13,96	0,126	80
C40230VAC15VA	230VAC 15VA	COLD	31,4	15,64	0,068	25
		HOT	-	14,41	0,063	80
C40230VAC24VA	230VAC 24VA	COLD	45,1	23,92	0,0154	23
		HOT	-	21,62	0,0154	100

Solenoid Vave Symbol	Valve Type/ Order No	Connection Size	Orifis Size	Pressure min/max			Kv
	S6210	mm	Size	Min	Ac max (bar)	DC max (bar)	l/min
	S6210.01.025	1/4"	2,5	0	40	21	3.2
	S6210.01.030	1/4"	3	0	40	15	4.6
	S6210.02.030	3/8"	3	0	40	15	4.6
	S6210.02.065	3/8"	6,5	0,1	30	21	11
	S6210.02.080	3/8"	8	0,1	40	40	13.5
	S6210.03.065	1/2"	6,5	0,1	30	21	11
	S6210.03.100	1/2"	10	0,1	30	21	19
	S6210.15.125	5/8"	12,5	0,1	30	10	48
	S6210.15.150	5/8"	15	0,1	40	40	70

Not: Please look catalogues for more details.

STANDARDS

- TORK solenoid valves 97/23/EC, are available for pressure equipment directive (PED) and 2006/95/ECC low voltage directive (LVD).