

General Purpose Solenoid Valves S1050 Series (G3/8", G1/2")

GENERAL FEATURES

- Coil Impregnation : Reinforced Fiber Glass
 - Protection Class : IP65 (ISO 60529) On request; IP68
 - Connector Specification : ISO 4400 / EN 175301-803 Form A, Terminal (Cable Ø6-8 mm)
 - On request; Connector with LED, PWM Socket.
- Specify coil voltage with order.
See coil section for detailed information.

ELECTRICAL CHARACTERISTICS

Continuous Duty	: ED %100
Coil Insulation Class	: H (180°C)(IEC 85)
Coil Impregnation	: Polyester Fiber Glass
Ambient Temperature	: -20°C, +60°C
Protection Degree	: IP65 (ISO 60529) On request; IP68
Electric Plug Connection	: DIN 46340 3-Poles Connector (DIN 43650)
Connector Specification	: ISO 4400 / EN 175301-803 Form A, Spade Plug (Cable Ø6-8 mm)
Electrical Safety	: IEC 335
Standard Voltages	: AC 12V 15VA, 24V 15VA, 48V 15VA, 110V 15VA, 230V 15VA, 230V 24VA, DC 12V 18W, 24V 18W, 48V 18W, 110V 18W

On request other voltages

Voltages Tolerance : AC -15%, +10% DC -5%, +10%

Frequency : 50 Hz (60 Hz...)

On request; Connector with LED, PWM Socket Specify coil voltage with order

MATERIALS

Body	: Brass
Sealing	: NBR (On request; EPDM, VITON)
Ring	: Copper (EN 12735-1)
Core, Core Tube, Springs	: Stainless Steel

OPTIONS

Connection: BSP; (On request NPT)

- On request CR-Ni or PTFE coated
- On request Atex (exproof) coil.

TECHNICAL FEATURES


Max. Viscosity : 5°E (-37cST veya mm²/s)

Response Time : Opening time : 30 ms
Closing Time : 30 ms

STANDARDS

- Standard tube connection G (BSP) (ISO 228-1) and other tube connections (NPT (ANSI 1.20.3)) are available on request.
- TORK solenoid valves 97/23/EC, are available for pressure equipment directive (PED) and 2006/95/ECC low voltage directive (LVD).

Not: Please look catalogues for more details

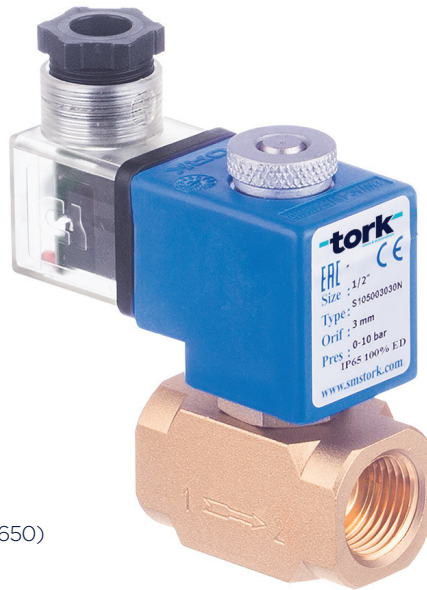

NORMALLY CLOSED


2/2 OPERATED

DIRECT ACTING

$\Delta P=0$



Dimensions (mm)								
	G	A	B	C	D	E	F	H
1/4"	44	80.5	32	38.9	79.5	25	25	
3/8"	50	80.5	32	38.9	79.5	25	25	
1/2"	50	80.5	32	38.9	79.5	25	25	

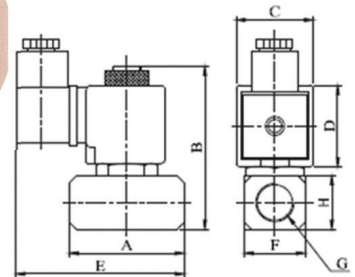

Coils	Nominal Values	Cold/Hot	Inrush	Holding	Current (A)	Surface Temperature (°C)
C40012VDC18W	12VDC 18W	COLD	19,56	19,56	1,63	20
		HOT	14,52	14,52	1,21	106
C40024VDC18W	24VDC 18W	COLD	20,88	20,88	0,87	25
		HOT	14,64	14,64	0,61	116
C40110VDC18W	110VDC 18W	COLD	19,96	19,96	0,18	23
		HOT	13,56	13,56	0,123	115
C40012VAC15VA	12VAC 15VA	COLD	23,81	16,43	1,3	25
		HOT	-	15,86	1,262	79
C40024VAC15VA	24VAC 15VA	COLD	25,82	15,02	0,62	22
		HOT	-	13,91	0,57	81
C40110VAC15VA	110VAC 15VA	COLD	30,65	15,17	0,137	24
		HOT	-	13,96	0,126	80
C40230VAC15VA	230VAC 15VA	COLD	31,4	15,64	0,068	25
		HOT	-	14,41	0,063	80
C40230VAC24VA	230VAC 24VA	COLD	45,1	23,92	0,0154	23
		HOT	-	21,62	0,0154	100

Solenoid Valve Symbol	Valve Type/Order No	Connection Size	Orifice Size	Pressure min/max		Kv	Seal			Weight
				Bar	Bar		NBR	Option	kg	
	S1050	G	mm	Bar	Bar	Lt/dk	NBR	Viton	EPDM	kg
	S1050.01.025	1/4"	2,5	0	12	3,2	✓	✓	✓	0,40
	S1050.01.040		4	0	9	6,4	✓	✓	✓	0,40
	S1050.01.060		6	0	6	11	✓	✓	✓	0,40
	S1050.02.030	3/8"	3	0	10	4,6	✓	✓	✓	0,48
	S1050.02.040		4	0	9	6,4	✓	✓	✓	0,48
	S1050.02.050		5	0	7	9,2	✓	✓	✓	0,48
	S1050.02.060		6	0	6	11	✓	✓	✓	0,48
	S1050.02.070		7	0	5	15	✓	✓	✓	0,48
	S1050.02.080		8	0	3	13,5	✓	✓	✓	0,48
	S1050.02.090		9	0	2	19	✓	✓	✓	0,48
	S1050.02.100	10	0	1	25	✓	✓	✓	0,48	
	S1050.03.030	1/2"	3	0	10	4,6	✓	✓	✓	0,47
	S1050.03.040		4	0	9	6,4	✓	✓	✓	0,47
	S1050.03.050		5	0	7	9,2	✓	✓	✓	0,47
	S1050.03.060		6	0	6	11	✓	✓	✓	0,47
	S1050.03.070		7	0	5	15	✓	✓	✓	0,47
	S1050.03.080		8	0	3	13,5	✓	✓	✓	0,47
	S1050.03.090		9	0	2	19	✓	✓	✓	0,47
	S1050.03.100		10	0	1	25	✓	✓	✓	0,47

General Purpose Solenoid Valves S1050 Series (G3/4", G1")

GENERAL FEATURES

- Coil Impregnation : Reinforced Fiber Glass
 - Protection Class : IP65 (ISO 60529) On request; IP68
 - Connector Specification : ISO 4400 / EN 175301-803 Form A, Terminal (Cable Ø6-8 mm)
 - On request; Connector with LED, PWM Socket.
- Specify coil voltage with order.
See coil section for detailed information.

ELECTRICAL CHARACTERISTICS

Continuous Duty	: ED %100
Coil Insulation Class	: H (180°C)(IEC 85)
Coil Impregnation	: Polyester Fiber Glass
Ambient Temperature	: -20°C, +60°C
Protection Degree	: IP65 (ISO 60529) On request; IP68
Electric Plug Connection	: DIN 46340 3-Poles Connector (DIN 43650)
Connector Specification	: ISO 4400 / EN 175301-803 Form A, Spade Plug (Cable Ø6-8 mm)
Electrical Safety	: IEC 335
Standard Voltages	: AC 12V 15VA, 24V 15VA, 48V 15VA, 110V 15VA, 230V 15VA, 230V 24VA, DC 12V 18W, 24V 18W, 48V 18W, 110V 18W

On request other voltages

Voltages Tolerance : AC -15%, +10% DC -5%, +10%

Frequency : 50 Hz (60 Hz...)

On request; Connector with LED, PWM Socket Specify coil voltage with order

MATERIALS

Body	: Brass
Sealing	: NBR (On request; EPDM, VITON)
Ring	: Copper (EN 12735-1)
Core, Core Tube, Springs	: Stainless Steel

OPTIONS

Connection: BSP; (On request NPT)

- On request CR-Ni or PTFE coated
- On request Atex (exproof) coil.

TECHNICAL FEATURES

Max. Viscosity : 5°E (-37cST veya mm²/s)

Response Time : Opening time : 30 ms
Closing Time : 30 ms

STANDARDS

- Standard tube connection G (BSP) (ISO 228-1) and other tube connections (NPT (ANSI 1.20.3)) are available on request.
- TORK solenoid valves 97/23/EC, are available for pressure equipment directive (PED) and 2006/95/ECC low voltage directive (LVD).

Not: Please look catalogues for more details



NORMALLY CLOSED

2/2 OPERATED


DIRECT ACTING

$\Delta P=0$



Dimensions (mm)

	G	A	B	C	D	E	F	H
3/4"	55	84	32	38,9	83,7	32	32	
1"	60	92	32	38,9	86,2	40	40	

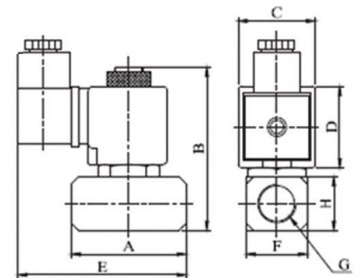

Coils	Nominal Values	Cold/ Hot	Inrush	Holding	Current (A)	Surface Temperature (°C)
C40024VDC18W	24VDC 18W	COLD HOT	20,88 14,64	20,88 14,64	0,87 0,61	25 116
C40110VDC18W	110VDC 18W	COLD HOT	19,96 13,56	19,96 13,56	0,18 0,123	23 115
C40012VAC15VA	12VAC 15VA	COLD HOT	23,81 -	16,43 15,86	1,3 1,262	25 79
C40024VAC15VA	24VAC 15VA	COLD HOT	25,82 -	15,02 13,91	0,62 0,57	22 81
C40110VAC15VA	110VAC 15VA	COLD HOT	30,65 -	15,17 13,96	0,137 0,126	24 80
C40230VAC15VA	230VAC 15VA	COLD HOT	31,4 -	15,64 14,41	0,068 0,063	25 80
C40230VAC24VA	230VAC 24VA	COLD HOT	45,1 -	23,92 21,62	0,0154 0,0154	23 100

Solenoid Valve Symbol	Valve Type/ Order No	Connection Size	Orifice Size	Pressure min/max		Kv	Seal			Weight	
				Bar	Bar		NBR	Viton	EPDM		
	S1050	G	mm	Bar	Bar	l/min				kg	
							Option				
	S1050.04.030	3/4"	3	0	10	4,6	✓	✓	✓	0,48	
	S1050.04.040		4	0	9	6,4	✓	✓	✓	0,48	
	S1050.04.050		5	0	7	9,2	✓	✓	✓	0,48	
	S1050.04.060		6	0	6	11	✓	✓	✓	0,48	
	S1050.04.070		7	0	5	15	✓	✓	✓	0,48	
	S1050.04.080		8	0	3	13,5	✓	✓	✓	0,48	
	S1050.04.090		9	0	2	19	✓	✓	✓	0,48	
	S1050.04.100		10	0	1	25	✓	✓	✓	0,48	
	S1050.05.030		1"	3	0	10	4,6	✓	✓	✓	0,47
	S1050.05.040			4	0	9	6,4	✓	✓	✓	0,47
	S1050.05.050	5		0	7	9,2	✓	✓	✓	0,47	
	S1050.05.060	6		0	6	11	✓	✓	✓	0,47	
	S1050.05.070	7		0	5	15	✓	✓	✓	0,47	
	S1050.05.080	8		0	3	13,5	✓	✓	✓	0,47	
	S1050.05.090	9		0	2	19	✓	✓	✓	0,47	
	S1050.05.100	10		0	1	25	✓	✓	✓	0,47	

General Purpose Solenoid Valves S1051 Series (G3/8", G1/2")

GENERAL FEATURES

- Coil Impregnation : Reinforced Fiber Glass
- Protection Class : IP65 (ISO 60529) On request; IP68
- Connector Specification : ISO 4400 / EN 175301-803 Form A, Terminal (Cable Ø6-8 mm)
- On request; Connector with LED, PWM Socket. Specify coil voltage with order. See coil section for detailed information.

ELECTRICAL CHARACTERISTICS

Continuous Duty	: ED %100
Coil Insulation Class	: H (180°C)(IEC 85)
Coil Impregnation	: Polyester Fiber Glass
Ambient Temperature	: -20°C, +60°C
Protection Degree	: IP65 (ISO 60529) On request; IP68
Electric Plug Connection	: DIN 46340 3-Poles Connector (DIN 43650)
Connector Specification	: ISO 4400 / EN 175301-803 Form A, Spade Plug (Cable Ø6-8 mm)
Electrical Safety	: IEC 335
Standard Voltages	: AC 12V 15VA, 24V 15VA, 48V 15VA, 110V 15VA, 230V 15VA, 230V 24VA DC 12V 18W, 24V 18W, 48V 18W, 110V 18W

On request other voltages

Voltages Tolerance : AC -15%, +10% DC -5%, +10%

Frequency : 50 Hz (60 Hz...)

On request; Connector with LED, PWM Socket Specify coil voltage with order

MATERIALS

Body	: Brass
Sealing	: NBR (On request; EPDM, VITON)
Ring	: Copper (EN 12735-1)
Core, Core Tube, Springs	: Stainless Steel

OPTIONS

Connection: BSP; (On request NPT)

• On request CR-Ni or PTFE coated

• On request Atex (exproof) coil.

TECHNICAL FEATURES

Max. Viscosity : 5°E (-37cST veya mm²/s)

Response Time : Opening time : 30 ms

Closing Time : 30 ms

STANDARDS

- Standard tube connection G (BSP) (ISO 228-1) and other tube connections (NPT (ANSI 1.20.3)) are available on request.
- TORK solenoid valves 97/23/EC, are available for pressure equipment directive (PED) and 2006/95/ECC low voltage directive (LVD).

Not: Please look catalogues for more details



NORMALLY OPEN


2/2 OPERATED

DIRECT ACTING

ΔP=0



Dimensions (mm)							
G	A	B	C	D	E	F	H
3/8"	50	80.5	32	38.9	79.5	25	25
1/2"	50	80.5	32	38.9	79.5	25	25

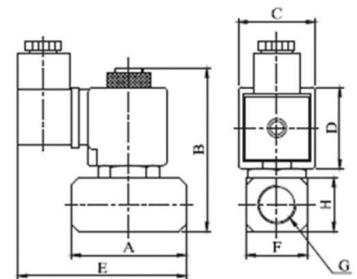

Coils	Nominal Values	Cold/ Hot	Inrush	Holding	Current (A)	Surface Temperature (°C)
C40012VDC18W	12VDC 18W	COLD	19,56	19,56	1,63	20
		HOT	14,52	14,52	1,21	106
C40024VDC18W	24VDC 18W	COLD	20,88	20,88	0,87	25
		HOT	14,64	14,64	0,61	116
C40110VDC18W	110VDC 18W	COLD	19,96	19,96	0,18	23
		HOT	13,56	13,56	0,123	115
C40012VAC15VA	12VAC 15VA	COLD	23,81	16,43	1,3	25
		HOT	-	15,86	1,262	79
C40024VAC15VA	24VAC 15VA	COLD	25,82	15,02	0,62	22
		HOT	-	13,91	0,57	81
C40110VAC15VA	110VAC 15VA	COLD	30,65	15,17	0,137	24
		HOT	-	13,96	0,126	80
C40230VAC15VA	230VAC 15VA	COLD	31,4	15,64	0,068	25
		HOT	-	14,41	0,063	80
C40230VAC24VA	230VAC 24VA	COLD	45,1	23,92	0,0154	23
		HOT	-	21,62	0,0154	100

Solenoid Valve Symbol	Valve Type/ Order No	Connection Size	Orifice Size	Pressure min/max		Kv	Seal			Weight					
				Bar	Bar		NBR	Viton	EPDM						
	S1051	G	mm	Bar	Bar	l/min	Opsiyon			kg					
							3/8"	1.8	0		12	1,6	✓	✓	✓
								2.5	0		10	3,2	✓	✓	✓
							1/2"	3.0	0		5	4,6	✓	✓	✓
								1.8	0		12	1,6	✓	✓	✓
							2.5	0	10		3,2	✓	✓	✓	
							3.0	0	5		4,6	✓	✓	✓	